



Product Specifications



PRODUCT NAME

SillDry sill pan flashing

MANUFACTURER

SillDry Industries, LLC
2800 Sterling Drive, Hatfield PA 19440
Phone: 215-634-9440
Fax: 215-494-0052
www.silldry.com

PRODUCT DESCRIPTION

SillDry Sill Pan Flashing (hereinafter, "SillDry" or "Product") is a fast and easy, patented one-piece expandable, waterproof sill pan flashing. It has revolutionary smart accordion technology allowing for easy installation in virtually any rough opening. Its raised back dam, built-in slope, and shims help protect the most vulnerable areas of window and door openings. Each shim can hold 800 lbs.

BASIC USE

SillDry's patented drainage design collects and directs to the exterior water that can leak through or around the window and door openings. It is made of a durable waterproof TPO material and has a 1/2 inch (7°) front to back positive slope. It is one-piece, requiring no onsite assembly and can be installed in seconds.

SillDry's versatility allows for the following applications:

- Membrane/Drainage Systems
- New Residential Construction
- Commercial Construction
- Wood Framing
- Steel Stud

SIZE

Depth: 4 5/8 inches and 6 5/8 inches
Standard sizes available from 18 inches to 12 feet
Custom sizes available above 12 feet

MATERIAL DURABILITY

Injection molded thermoplastic olefin (TPO), ideal in applications for industrial and automotive markets where material durability for long-term use are integral to part function. Highly resistant to impacts and tears, waterproof, low thermal conductivity, UV resistant, and impact resistant.

APPLICABLE STANDARDS


- Compatible with virtually all different manufacturers' products
- Pan Flashing Systems and Subsills for Weatherability ASTM E2112-07 (5.16)

CODE COMPLIANCE

- International Residential Code (IRC)
- International Building Code (IBC)

GUIDELINES

SillDry sill pan flashing should be installed and integrated with the wall's weather resistive barrier in a shingle-lap fashion. Specially designed raised rear back dam allows for the easy installation of backer rod and sealant joint for extra energy efficiency. Install SillDry on subsill using pan head screws (not included). See diagram on right for placement. SillDry has a nominal height of 1" to create the built in slope to exterior as required by ASTM. Please check that your rough opening head height is sufficient to accommodate SillDry. Visit www.silldry.com for video installation instructions.

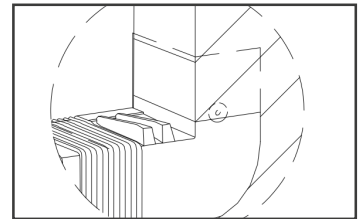

WARRANTY

Please see SillDry Limited Warranty at www.silldry.com

Physical Properties	Typical Values	Test Method
Notched Izod Impact @ -30°C	11 kJ/m ²	ISO 180
Notched Charpy Impact @ -30°C	7.5 kJ/m ²	ISO 179
Tensile Strength @ Yield (50mm/minute)	16 MPg	ISO 527
Tensile Modulus (1mm/minute)	1,400 MPa	ISO 527
Flexural Modulus (2mm/minute)	1,100 MPa	ISO 178
Deflection Temp. @ 455 KPa	98°C	ISO 75
Multiaxial Impact @ -30°C	17 J	ASTM D3763
Multiaxial Impact @ -30°C	14 J	ISO 6603